


## FEATURES

<b>APPLICATIONS</b>	Accent, Decorative Lighting
<b>VOLTAGE</b>	24VDC
<b>LAMP TYPE</b>	LEDs
<b>DIMMING</b>	Forward Phase (TRA) 0-10V (TRA-E) Hi-Lume 1% (2 Wire) Hi-Lume 1% (3 Wire)
<b>LENGTH</b>	Built to Order
<b>MOUNTING</b>	Mounting Channel
<b>CRI</b>	> 90
<b>EFFICACY</b>	95 Lumens per Watt
<b>VIEWING ANGLE</b>	120 Degrees
<b>L70 LED LIFE</b>	60,000 hrs.
<b>MAXIMUM RUN*</b> (Based on 5 amps)	18' (13W) 21' (11W) 26' (9W) 33' (7.2W) 36' (3W, 5W)
<b>LISTING</b>	Dry or Wet Location

## ELECTRICAL

lipLEDs is a 24 Volt system. lipLEDs requires a 24VDC (secondary side) transformer. The standard primary side voltage on our transformers is 120V or 277V. Consult factory for other primary side voltages. A thermal breaker box can be used for secondary protection. See Transformer Brochure.

## ACCESSORIES (Not Included)

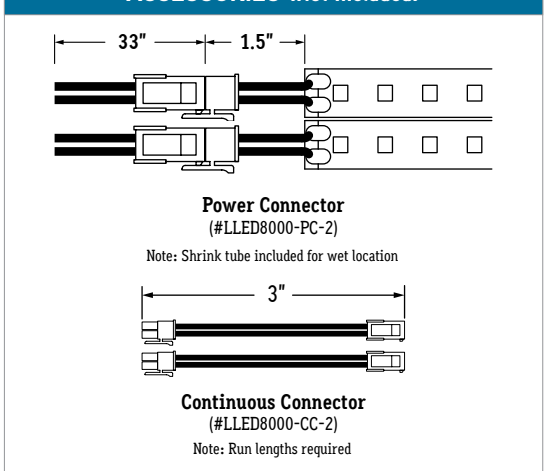


## LED SPECIFICATIONS


LAMP	DESCRIPTION
LED-2.4K	2400K Warm White
LED-2.7K	2700K Warm White
LED-3.0K	3000K Warm White
LED-3.5K	3500K Neutral White
LED-4.0K	4000K Cool White
LED-4.5K	4500K Cool White

Consult factory for cooler white color temperatures. Consult factory for cooler white color temperatures, Red, Green, Blue, and RGB

NOT TO SCALE

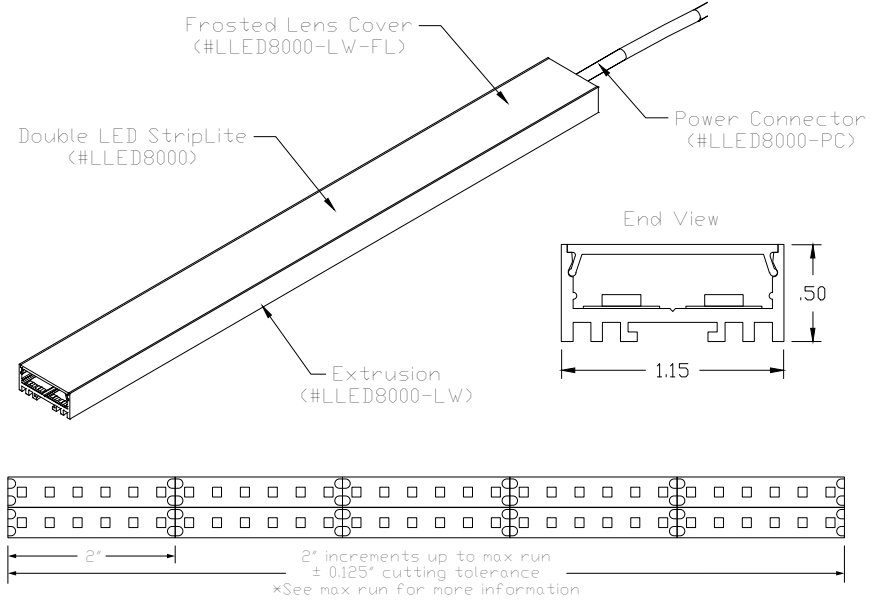

## MOUNTING OPTIONS



## HOW TO ORDER OR SPECIFY Product Code: (Fill in the blanks)

SERIES	OPTICS	WATTS PER FOOT	DIMMING	LAMP	DRY OR WET	FINISH
Ex. LLED8000-LW	F	5W	10V	LED-4.5K	DRY	BK
LLED8000-LW	Clear Lens (CL)	3 Watts (3W) (285 Lumens/ft)	Forward Phase (DM)	LED-2.4K	Indoor (DRY)	Natural (NA)
LED-2.7K				Polished (PA)		
	50% Semi-Frost Lens (SF)	5 Watts (5W) (475 Lumens/ft)	0-10V (10V)	LED-3.0K	Outdoor (WET)	White (WH)**
				LED-3.5K		Satin (SA)
	100% Frosted Lens (F)	7.2 Watts (7.2W) (684 Lumens/ft)	Hi-Lume 1% (2 Wire)***	LED-4.0K		Black (BK)
				LED-4.5K	Green (GN)	
		9 Watts (9W) (856 Lumens/ft)	Hi-Lume 1% (3 Wire)****			Red (RD)
		11 Watts (11W) (1046 Lumens/ft)	Leave Blank for Non-Dimming			Silver (SR)
		13 Watts (13W) (1236 Lumens/ft)				

\*\*\*\* 40 watt max Hi-Lume Lutron #L3DA4U1UKL-CV240  
 \*\*\* 40 watt max Hi-Lume Lutron #LTEA4U1UKL-CV240  
 \*\* Standard finish - White if left blank  
 \* Maximum run based on 4 amps for class II applications: 14' (13W), 17' (11W), 21' (9W), 26' (7.2W), 36' (3W, 5W)